

ANNEAU de TÊTE INOX

Pour élingue-chaîne INOX

RÉF. 5050 / 5051

Acier Haute Résistance INOX AISI 316

Coefficient de sécurité 1/4

Norme DIN 5688




AISI 316

RÉF 5050 (Grade 60)

CODE	AA	A	B	C	D	E	F	G
CMU verticale (kg)	850	1600	2600	3500	6300	8900	13200	14700
A (mm)	10	13	16	18	23	27	32	36
B (mm)	50	60	60	75	90	100	110	140
C (mm)	80	110	110	135	160	180	200	260
s (mm)	9	10	14	14	17	20	26	29
poids (kg)	0,14	0,34	0,53	0,92	1,60	2,46	4,14	6,22

s = épaisseur du méplat

RÉF 5050

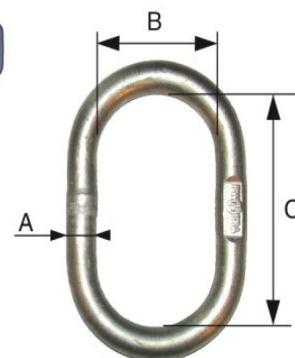


ANNEAU TRIPLE - RÉF 5051 (Grade 60)

CODE	A	B	C	E
CMU verticale (kg)	1300	3350	5250	13200
A (mm)	13	18	23	32
B (mm)	60	75	90	110
C (mm)	110	135	160	200
a (mm)	10	16	20	27
b (mm)	20	34	40	65
c (mm)	44	70	85	140
s (mm)	10	14	14	20
poids (kg)	0,52	1,64	3,02	7,98

s = épaisseur du méplat



RÉF 5051

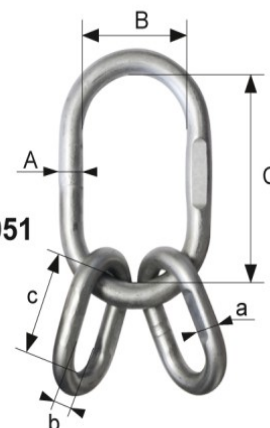

CE ÉQUIPEMENT
DE LEVAGE
DIRECTIVE 2006/42/CE