

## TENDEUR – Inox

RÉF. 5291 / 5292 / 5293 / 5298



AISI 316

réf 5291  
2 crochets



réf 5292  
2 yeux




réf 5293  
1 crochet + 1 oeil



| CODE (Réf. 5291 / 5292 / 5293)               | A         | B         | BA        | C         | D         | E         | F         |
|--|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| diam tige (mm)                               | 5         | 6         | 8         | 10        | 12        | 16        | 20        |
| L1 (mm)                                      | 70        | 90        | 120       | 150       | 200       | 250       | 300       |
| L2 mini / maxi (mm)                          | 110 - 170 | 140 - 220 | 180 - 280 | 230 - 360 | 280 - 460 | 370 - 590 | 420 - 650 |
| B (mm)                                       | 19        | 22        | 28        | 35        | 40        | 56        | 62        |
| D (mm)                                       | 8         | 10        | 14        | 16        | 18        | 26        | 30        |
| S (mm)                                       | 9         | 10        | 11        | 12        | 14        | 16        | 18        |
| capacité de charge statique indicative (kg)* | 140 *     | 225 *     | 410 *     | 650 *     | 930 *     | 1770 *    | 2700 *    |
| poids (kg)                                   | 0,04      | 0,08      | 0,16      | 0,25      | 0,56      | 1,1       | 1,9       |

\* Uniquement pour Modèle «2 yeux» réf. 5292

| CODE (Réf. 5298)  | A   | B   | C   | D   | E   | F   | G    | H    | J    |
|-------------------|-----|-----|-----|-----|-----|-----|------|------|------|
| A (mm)            | 5   | 6   | 8   | 10  | 12  | 14  | 16   | 20   | 24   |
| B (mm)            | 72  | 92  | 122 | 150 | 201 | 225 | 244  | 295  | 350  |
| Ø F (mm)          | 5   | 6   | 8   | 10  | 12  | 14  | 16   | 20   | 24   |
| Charge utile (kg) | 115 | 160 | 300 | 470 | 690 | 940 | 1290 | 2130 | 3060 |

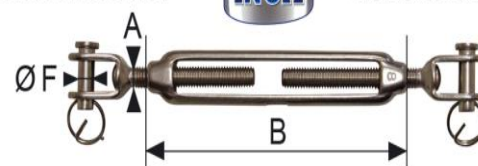

réf 5298 2 chapes soudées inox

